


WM18-PVC

MODEL NUMBER

Building integrated PVC system with built in UV protection designed to manage wires in AGT FlexLight photovoltaic laminate installations. Protects wires and organizes the roof. Delivered as three components. The base and cover slide together, the wings protect the wire leads from each PV laminate strip. Delivered in 5.67 meter lengths with sets of 15 wings.

FEATURES


- Lightweight
- Easy to assemble
- Durable
- Adheres firmly

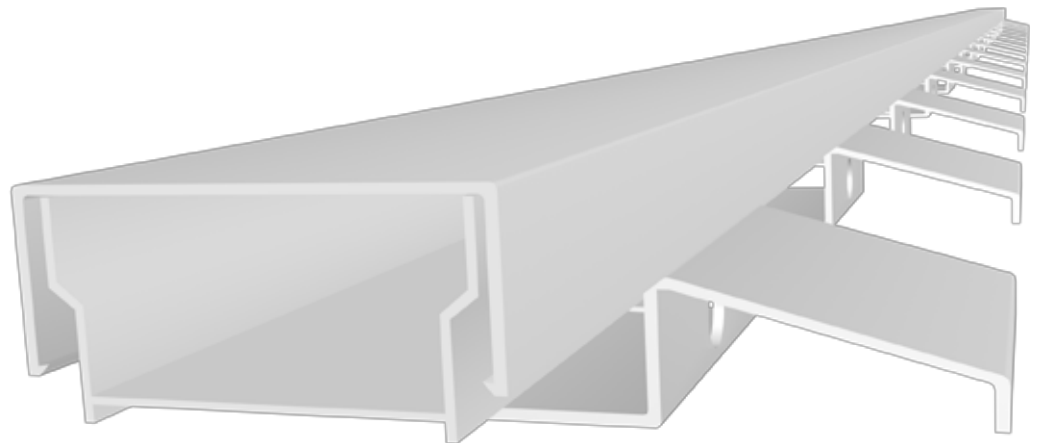

Cover	Outside Dimension	Millimeter
A	Width	87.37
B	Height	45.21

Tray	Inside Dimension	Millimeter
A	Width	73.66
B	Width	63.50
C	Height	45.21


Wing	Inside Dimension	Millimeter
A	Width	102.36
B	Width	71.12
C	Width	105.41
D	Width	282.19
E	Height	59.18

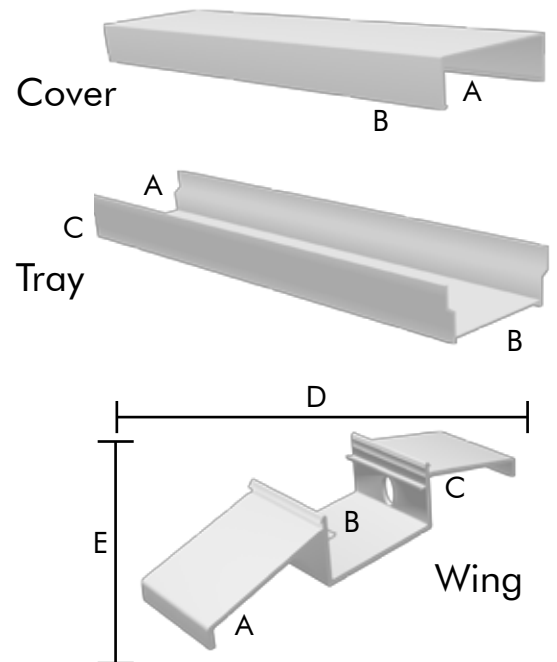

CERTIFICATIONS
 IEC61537

PHYSICAL PROPERTIES

Tensile strength (psi)	d-638	6200.00
Flexular strength (psi)	d-790	10,500.00
Flexular modulus (psi)	d-790	380,000.00
Notched izod impact 3mm	d-256	8.00
Specific gravity	d-792	1.43
Heat deflection @ 264 psi	d-648	167.00
Recommended melt temp.	360°	182°

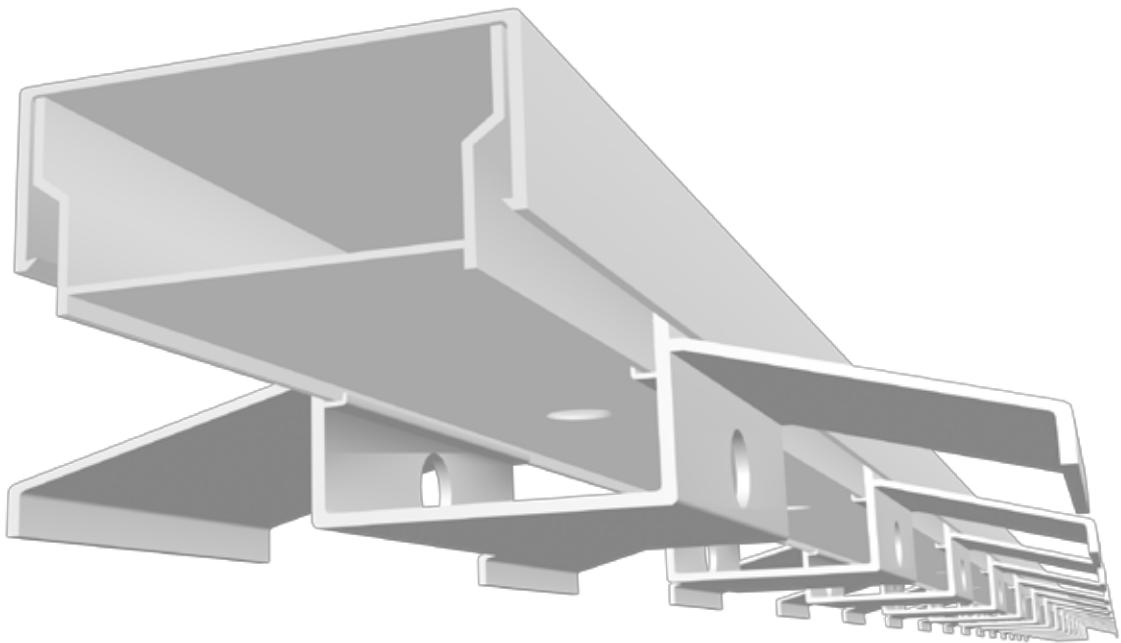

COMPONENTS	wt or % VOLI	ACGIH TL V	OSHA
Acrylic polymers established	<15%	none	none
Calcium carbonate	<10%	10mg\m3	15mg\m3
Titanium dioxide	<10%	10mg\m3	10mg\m3
Organo tin complex	<5%	0.1mg\m3	0.1mg\m3
Vinyl chloride	<0.00%	5ppm	1ppm